

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 July 2001 (12.07.2001)

PCT

(10) International Publication Number
WO 01/50783 A2

(51) International Patent Classification⁷: **H04Q 7/00**

(21) International Application Number: PCT/US01/00487

(22) International Filing Date: 3 January 2001 (03.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/477,278 4 January 2000 (04.01.2000) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(72) Inventors: **HSU, Raymond, Tah-Sheng**; 17775 Penna-
cook Court, San Diego, CA 92127 (US). **REZAIIFAR,**
Ramin; 10896 Caminito Arcada, San Diego, CA 92131
(US).

(74) Agents: **WADSWORTH, Philip, R. et al.**; Qualcomm In-
corporated, 5775 Morehouse Drive, San Diego, CA 92121-
1714 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished
upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR REQUESTING POINT-TO-POINT PROTOCOL (PPP) INSTANCES FROM A
PACKET DATA SERVICES NETWORK

(57) Abstract: A method and apparatus for requesting PPP instances from a packet data services network includes a mobile station configured to send an origination message to a packet data service node (PDSN) at which it has arrived upon leaving the vicinity of another PDSN. The message informs the new PDSN of the new location of the mobile station and indicates both the number of dormant PPP instances associated with the mobile station and a service reference identifier for each such PPP instance. A flag within the message may be used to indicate whether the PPP instances are dormant (i.e., whether the mobile station is engaged in a call).

WO 01/50783 A2

METHOD AND APPARATUS FOR REQUESTING POINT-TO-POINT PROTOCOL (PPP) INSTANCES FROM A PACKET DATA SERVICES NETWORK

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

10 The present invention pertains generally to the field of communications, and more specifically to requesting point-to-point protocol (PPP) instances from a packet data services network.

II. Background

15 With the increasing popularity of both wireless communications and Internet applications, a market has arisen for products and services that combine the two. As a result, various methods and systems are under development to provide wireless Internet services that would allow a user of a wireless telephone or terminal to access email, web pages, and other network
20 resources. Because information on the Internet is organized into discrete "packets" of data, these services are often referred to as "packet data services."

Among the different types of wireless communication systems to be used to provide wireless packet data services are code division multiple access (CDMA) systems. The use of CDMA modulation techniques is one of several
25 techniques for facilitating communications in which a large number of system users are present. The framing and transmission of Internet Protocol (IP) data through a CDMA wireless network is well known in the art and has been described in TIA/EIA/IS-707-A, entitled "DATA SERVICE OPTIONS FOR SPREAD SPECTRUM SYSTEMS," hereinafter referred to as IS-707.

30 Other multiple access communication system techniques, such as time division multiple access (TDMA), frequency division multiple access (FDMA), and AM modulation schemes such as amplitude companded single sideband (ACSSB) modulation are known in the art. These techniques have been standardized to facilitate interoperation between equipment manufactured by
35 different companies. CDMA communications systems have been standardized in the United States in Telecommunications Industry Association TIA/EIA/IS-95-B, entitled "MOBILE STATION-BASE STATION COMPATIBILITY

STANDARD FOR DUAL-MODE WIDEBAND SPREAD SPECTRUM CELLULAR SYSTEMS," hereinafter referred to as IS-95.

5 The International Telecommunications Union recently requested the submission of proposed methods for providing high-rate data and high-quality speech services over wireless communication channels. A first of these proposals was issued by the Telecommunications Industry Association, entitled "The cdma2000 ITU-R RTT Candidate Submission," and hereinafter referred to as cdma2000. A second of these proposals was issued by the European Telecommunications Standards Institute (ETSI), entitled "The ETSI UMTS
10 Terrestrial Radio Access (UTRA) ITU-R RTT Candidate Submission," also known as "wideband CDMA," and hereinafter referred to as W-CDMA. A third proposal was submitted by U.S. TG 8/1, entitled "The UWC-136 Candidate Submission," hereinafter referred to as EDGE. The contents of these submissions are public record and are well known in the art.

15 Several standards have been developed by the Internet Engineering Task Force (IETF) to facilitate mobile packet data services using the Internet. Mobile IP is one such standard, and was designed to allow a device having an IP address to exchange data with the Internet while physically travelling throughout a network (or networks). Mobile IP is described in detail in IETF
20 request for comments (RFC), entitled "IP Mobility Support," and incorporated by reference.

Several other IETF standards set forth techniques referred to in the above-named references. Point-to-Point Protocol (PPP) is well known in the art and is described in IETF RFC 1661, entitled "The Point-to-Point Protocol (PPP)"
25 and published in July 1994, hereinafter referred to as PPP. PPP includes a Link Control Protocol (LCP) and several Network Control Protocols (NCP) used for establishing and configuring different network-layer protocols over a PPP link. One such NCP is the Internet Protocol Control Protocol (IPCP), well known in the art and described in IETF RFC 1332, entitled "The PPP Internet Protocol
30 Control Protocol (IPCP)," published in May of 1992, and hereinafter referred to as IPCP. Extensions to the LCP are well known in the art and described in IETF RFC 1570, entitled "PPP LCP Extensions," published in January 1994, and hereinafter referred to as LCP.

35 Mobile stations, such as, e.g., cellular or PCS telephones with Internet connections, typically transmit packet data over a network by establishing a PPP connection (or PPP instance, or PPP session), with a packet data service node (PDSN). The mobile station sends packets across an RF interface such as, e.g., a CDMA interface, to a base station or packet control function. The base

station or packet control function establishes the PPP instance with the PDSN. More than one such PPP instance may be established contemporaneously (e.g., if a phone and a laptop each require a connection). Data packets are routed from the PDSN to a home agent (HA) via an IP network in accordance with the particular PPP instance. Packets being sent to the mobile station are routed from the HA via the IP network to the PDSN, from the PDSN to the base station or packet control function via the PPP instance, and from the base station or packet control function to the mobile station via the RF interface.

When a mobile station leaves the vicinity of a PDSN and enters the vicinity of another PDSN, the mobile station sends an origination message. If the mobile station is engaged in a data call, the origination message requests reconnection or establishment of the associated PPP instance. Otherwise, the origination message informs the new PDSN of the new location of the mobile station. Nevertheless, any data packets being sent to the mobile station will be routed to the old PDSN because the mobile station does not have a PPP instance established with the new PDSN. Accordingly, packets destined for the mobile station will become lost. Thus, there is a need for a method of informing a PDSN of the number and identities of PPP instances to be established for a newly arriving mobile station.

SUMMARY OF THE INVENTION

The present invention is directed to a method of informing a PDSN of the number and identities of PPP instances to be established for a newly arriving mobile station. Accordingly, in one aspect of the invention, a method of informing a packet data services network of dormant network connections associated with a mobile station when the mobile station moves from a first infrastructure element of the packet data services network to a second infrastructure element of the packet data services network is provided. The method advantageously includes the step of transmitting from the mobile station a message including a number of dormant network connections associated with the mobile station and a list of identifiers associated with the dormant network connections.

In another aspect of the invention, a mobile station configured to inform a packet data services network of dormant network connections associated with the mobile station when the mobile station moves from a first infrastructure element of the packet data services network to a second infrastructure element of the packet data services network is provided. The mobile station

advantageously includes an antenna; a processor coupled to the antenna; and a processor-readable medium accessible by the processor and containing a set of instructions executable by the processor to modulate and transmit from the mobile station a message including a number of dormant network connections associated with the mobile station and a list of identifiers associated with the dormant network connections.

In another aspect of the invention, a mobile station configured to inform a packet data services network of dormant network connections associated with the mobile station when the mobile station moves from a first infrastructure element of the packet data services network to a second infrastructure element of the packet data services network is provided. The mobile station advantageously includes a device configured to transmit from the mobile station a message including a number of dormant network connections associated with the mobile station and a list of identifiers associated with the dormant network connections.

In another aspect of the invention, a mobile station configured to inform a packet data services network of dormant network connections associated with the mobile station when the mobile station moves from a first infrastructure element of the packet data services network to a second infrastructure element of the packet data services network is provided. The mobile station advantageously includes means for transmitting from the mobile station a message including a number of dormant network connections associated with the mobile station and a list of identifiers associated with the dormant network connections.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a wireless communication system configured to perform packet data networking.

FIG. 2 is a block diagram of a packet data service node (PDSN).

FIG. 3A is a block diagram of two PDSNs coupled to radio access networks (RANs) wherein a mobile station (MS) has traveled to the vicinity of the second PDSN without establishing new PPP instances, and FIG. 3B is a block diagram of two PDSNs coupled to RANs wherein an MS has traveled to the vicinity of the second PDSN and established new PPP instances.

FIG. 4 is a flow chart illustrating method steps performed by a mobile station to inform a PDSN of the number and identities of PPP instances required to be established.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 In one embodiment a wireless communication system 100 for performing packet data networking includes the elements shown in FIG. 1. A mobile station (MS) 102 is advantageously capable of performing one or more wireless packet data protocols. In one embodiment the MS 102 is a wireless telephone running an IP-based Web-browser application. In one embodiment the MS 102 is not connected to any external device, such as a laptop. In an alternative embodiment, the MS 102 is a wireless telephone that is connected to an external device, wherein a protocol option is used that is equivalent to the Network Layer R_m Interface Protocol Option described in IS-707. In another alternative embodiment, the MS 102 is a wireless telephone that is connected to an external device, wherein a protocol option is used that is equivalent to the Relay Layer R_m Interface Protocol Option described in the aforementioned IS-707.

20 In a particular embodiment, the MS 102 communicates with an Internet Protocol (IP) network 104 via wireless communications with a radio access network (RAN) 106. The MS 102 generates IP packets for the IP network 104 and encapsulates the IP packets into frames destined for a Packet Data Serving Node (PDSN) 108. In one embodiment the IP packets are encapsulated using a point-to-point protocol (PPP) and the resultant PPP byte stream is transmitted through a code division multiple access (CDMA) network using a Radio Link Protocol (RLP).

25 The MS 102 sends the frames to the RAN 106 by modulating and transmitting the frames through an antenna 110. The frames are received by the RAN 106 through an antenna 112. The RAN 106 sends the received frames to the PDSN 108, at which the IP packets are extracted from the received frames. After the PDSN 108 extracts the IP packets from the data stream, the PDSN 108 routes the IP packets to the IP network 104. Conversely, the PDSN 108 can send encapsulated frames through the RAN 106 to the MS 102.

35 In one embodiment the PDSN 108 is coupled to a Remote Authentication Dial In User Service (RADIUS) server 114 for authenticating the MS 102. The PDSN 108 is also coupled to a Home Agent (HA) 116 for supporting the Mobile IP protocol. The HA 116 advantageously includes entities capable of authenticating the MS 102 and for granting the MS 102 the use of an IP address when Mobile IP is to be used. One skilled in the art would recognize that the

RADIUS server 114 could be replaced with a DIAMETER server or any other Authentication, Authorization, and Accounting (AAA) server.

5 In one embodiment the MS 102 generates IP packets, and the PDSN 108 is coupled to the IP network 104. One skilled in the art would recognize that alternate embodiments could use formats and protocols other than IP. In addition, the PDSN 108 may be coupled to a network capable of employing protocols other than IP.

10 In one embodiment the RAN 106 and the MS 102 communicate with each other using wireless spread spectrum techniques. In a particular embodiment, the data is wirelessly transmitted using CDMA multiple access techniques, as described in U.S. Patent Nos. 5,103,459 and 4,901,307, which are assigned to the assignee of the present invention and fully incorporated herein by reference. One skilled in the art would recognize that the methods and techniques described herein may be used in conjunction with several alternate modulation
15 techniques, including TDMA, cdma2000, W-CDMA, and EDGE.

In one embodiment the MS 102 has the ability to perform RLP, PPP, Challenge Handshake Authentication Protocol (CHAP), and Mobile IP. In a particular embodiment, the RAN 106 communicates with the MS 102 using RLP. In one embodiment the PDSN 108 supports PPP functionality, including
20 Link Control Protocol (LCP), CHAP, and the PPP Internet Protocol Control Protocol (IPCP). In one embodiment the PDSN 108, RADIUS server 114, and HA 116 are physically located in different physical devices. In an alternate embodiment, one or more of these entities can be located in the same physical device.

25 In one embodiment PDSN 200 includes a control processor 202, a network packet switch 204, an IP network interface 206, and an RAN interface 208, as shown in FIG. 2. The IP network interface 206 is coupled to the network packet switch 204. The network packet switch 204 is coupled to the control processor 202 and to the RAN interface 208. The RAN interface 208 receives data packets from an RAN (not shown). The RAN interface 208 receives the
30 packets over a physical interface. In one embodiment the physical interface is T3, a standard digital telecommunications interface that has a forty-five Mbps transfer rate. The physical T3 interface could be replaced with a T1 interface, an Ethernet interface, or any other physical interface used for data networking.

35 The RAN interface 208 delivers the received packets to the network packet switch 204. In an exemplary embodiment, the connection between the network packet switch 204 and the RAN interface 208 comprises a memory bus connection. The connection between the RAN interface 208 and the network

packet switch 204 could be an Ethernet or any other of a variety of communications links that are well known in the art. The RAN interface 208 is also advantageously capable of receiving packets from the network packet switch 204 over the same connection and transmitting the packets to the RAN.

5 The network packet switch 204 is advantageously a configurable switch that is capable of routing packets between a variety of interfaces. In one embodiment the network packet switch 204 is configured such that all packets received from the RAN interface 208 and the IP network interface 206 are routed to the control processor 202. In an alternate embodiment, the network
10 packet switch 204 is configured such that a subset of received frames from the RAN interface 208 are delivered to the IP network interface 206 and a remaining subset of received frames from the RAN interface 208 are delivered to the control processor 202. In one embodiment the network packet switch 204 delivers packets to the control processor 202 via a shared memory bus
15 connection. The connection between the RAN interface 208 and the network packet switch 204 could be an Ethernet or any other of a variety of well known types of communications links. While the network packet switch 204 is coupled to the RAN interface 208 and the IP network interface 206, one skilled in the art would appreciate that the network packet switch 204 could be coupled to a
20 smaller or larger number of interfaces. In an embodiment in which the network packet switch 204 is coupled to a single network interface, that network interface is coupled to both an IP network (not shown) and an RAN. In an alternate embodiment, the network packet switch 204 is incorporated into the control processor 202 such that the control processor 202 communicates
25 directly with the network interface(s).

 The control processor 202 exchanges information packets with the RAN interface 208 when a connection with an MS (not shown) is desired. After the control processor 202 receives an information packet indicating that a connection with an MS is desired, the control processor 202 negotiates a PPP
30 session with the MS. To negotiate the PPP session, the control processor 202 generates PPP frames and sends the PPP frames to the RAN interface 208, and then interprets responses from the MS received from the RAN interface 208. The types of frames generated by the control processor 202 include LCP frames, IPCP frames, and CHAP frames. The MS may be authenticated in accordance
35 with a method described in a U.S. Application filed December 3, 1999, serial number not yet assigned, entitled METHOD AND APPARATUS FOR AUTHENTICATION IN A WIRELESS TELECOMMUNICATIONS SYSTEM,

assigned to the assignee of the present invention, and fully incorporated herein by reference.

The control processor 202 generates packets for exchange with AAA servers (not shown) and Mobile IP Has (also not shown). Additionally, for each
5 established PPP session, the control processor 202 encapsulates and unencapsulates IP packets. One skilled in the art would recognize that the control processor 202 may be implemented using field-programmable gate arrays (FPGAs), programmable logic devices (PLDs), digital signal processors (DSPs), one or more microprocessors, an application specific integrated circuit
10 (ASIC), or any other device capable of performing the PDSN functions described above.

In one embodiment the packets are delivered to the network packet switch 204, which, in turn, delivers the packets to the IP network interface 206 for delivery to the IP network. The IP network interface 206 transmits the
15 packets over a physical interface. In one embodiment the physical interface is T3, a standard digital telecommunications interface that has a forty-five Mbps transfer rate. The physical T3 interface could be replaced with a T1 interface, an Ethernet interface, or any other physical interface used for data networking. The IP network interface 206 is also advantageously capable of receiving
20 packets over the same physical interface.

An MS 300 transmits packet data over an IP network (not shown) by establishing a PPP instance 302 with a PDSN 304, as shown in FIG. 3A. The MS 300 sends packets across an RF interface such as, e.g., a CDMA interface, to a packet control function or base station (PCF/BS) 306. The PCF/BS 306
25 establishes the PPP instance 302 with the PDSN 304. Another PPP instance 308 may be established contemporaneously (e.g., if a phone and a laptop each require a connection). Data packets are routed from the PDSN 304 to an HA (not shown) via an IP network (also not shown) in accordance with the particular PPP instance 302, 308. Packets being sent to the MS 300 are routed
30 from the HA via the IP network to the PDSN 304, from the PDSN 304 to the PCF/BS 306 via the PPP instance 302, 308, and from the PCF/BS 306 to the MS 300 via the RF interface. The PCF/BS 306 includes a PCF/BS table 310. The PCF/BS table 310 includes a list of MS identifiers (MS_IDs), service reference identifiers (SR_IDs), and RAN-to-PDSN interface (R-P) identifiers (R-P IDs).
35 The PDSN 304 includes a PDSN table 312. The PDSN table 312 includes a list of IP addresses, MS_IDs, SR_IDs, and R-P IDs. The PDSN 304 may be served by more than one PCF/BS 306, but for simplicity only one PCF/BS 306 is shown coupled to the PDSN 304.

While the MS 300 is idle (i.e., not engaged in a telephone call), the MS 300 sends short data bursts as PPP frames. Each such PPP frame includes an SR_ID that identifies which PPP instance 302, 308 is to be the destination for the PPP frame. As understood by those of skill in the art, the PPP frames encapsulate other protocols. In an exemplary embodiment, the PPP frame encapsulates a Transport Control Protocol (TCP) frame and identifies the protocol of the encapsulated TCP frame. The TCP frame encapsulates an IP frame and identifies the protocol of the IP frame. The IP frame encapsulates a frame such as an RLP frame and also includes a source header and a destination header. The RLP frame may encapsulate a data frame configured in accordance with, e.g., IS-95B.

When the MS 300 leaves the vicinity of the PDSN 304 and enters the vicinity of another PDSN 314, the MS 300 sends an origination message. If the MS 300 is engaged in a data call, the call is "handed off" from the first PCF/BS 306 to a second PCF/BS 316 coupled to the second PDSN 314. An exemplary handoff procedure is described in U.S. Patent No. 5,267,261, which is assigned to the assignee of the present invention and fully incorporated herein by reference. The MS 300 then sends an origination message informing the second PDSN 324 of its new location and requesting the establishment or reconnection of the PPP instance associated with the call. Otherwise, the PPP instances 302, 308 are "dormant" and the MS 300 performs a dormant handoff and then sends an origination message that informs the second PDSN 314 of the new location of the MS 300. It would be understood by those of skill that the second PDSN 314 may also be served by more than one PCF/BS 316, but for simplicity only one PCF/BS 316 is shown coupled to the PDSN 314. Although the network has been informed of the new location of the MS 300, the MS 300 requires that two new PPP instances be initiated (because the MS 300 has two dormant SR_IDs pertaining to the dormant PPP service instances 302, 308). The new PCF/BS 316 and PDSN 306 do not have tables listing SR_IDs or R-P IDs because the two necessary PPP instances have not been established. Accordingly, data packets being sent to the MS 300 will be routed to the first PDSN 304 because the MS 300 does not have a PPP instance established with the new PDSN 314. Hence, packets destined for the MS 300 will become lost.

In one embodiment, as shown in FIG. 3B, an MS 318 travels from the vicinity of a first PDSN 320 and associated PCF/BS 322 to the vicinity of a second PDSN 324 and associated PCF/BS 326 and informs the second PDSN 324 of the number and identities of PPP instances that must be established. The first PDSN 320 had established two PPP instances 328, 330 between the PDSN

320 and the PCF/BS 322, which were dormant (i.e., not being used to transmit traffic channel data). The various established connections and addresses are included in the respective tables 332, 334 for the PDSN 320 and the PCF/BS 322. The number (two) of, and identifiers for, two newly required PPP instances 336, 338 are advantageously included in the origination message transmitted by the MS 318. For simplicity, only one PCF/BS 322, 326 is shown serving each respective PDSN 320, 324, but it would be understood that there could be multiple PCF/BSs serving each PDSN 320, 324. The origination message advantageously includes a Data-Ready-to-Send (DRS) flag that may be set to zero to identify to the PDSN 324 the identity and total number of packet services that are dormant, thereby allowing the PDSN 324 to establish PPP instances 336, 338 and the requisite R-P links between the PDSN 324 and the PCF/BS 326. If a data call is in progress, the MS 318 sets the DRS flag to one and requests reconnection or establishment of the PPP instance 328, 330 associated with the call. If no call is in progress, the MS 318 sets the DRS flag is set to zero and reports the SR_IDs for all dormant PPP service instances 328, 330 (SR_IDs 1 and 2) associated with the MS 318. The PCF/BS 326 then sends a message to the PDSN 324 that includes the list of SR_IDs and the MS_ID. The PDSN 324 establishes two PPP instances 336, 338 and two (the number of SR_IDs reported by the MS 318) R-P connections. The PDSN 324 and the PCF/BS 326 then update their respective tables 340, 342. Thus, the list of dormant SR_IDs informs the PDSN 324 how many PPP instances 336, 338 need to be initiated and also gives the PCF/BS 326 enough information to update its R-P/SR_ID table 342.

In one embodiment an MS (not shown) performs the method steps illustrated in FIG. 4 when leaving the vicinity of a PDSN (also not shown) and entering the vicinity of a neighboring PDSN (also not shown). In step 400 the MS determines whether it is arriving at a new PDSN. If the MS is not arriving at a new PDSN, the MS returns to step 400. If, on the other hand, the MS is arriving at a new PDSN, the MS proceeds to step 402. In step 402 the MS determines whether it is engaged in a data call. If the MS is engaged in a data call, the MS proceeds to step 404. If, on the other hand, the MS is not engaged in a data call, the MS proceeds to step 408.

In step 404 the MS engages in handoff. The MS then proceeds to step 406. In step 406 the MS sends an origination message to the new PDSN informing the PDSN of its location. A DRS flag in the origination message is set to one, and the MS is requesting reconnection or establishment of a PPP instance associated with the data call. In step 408 the MS engages in dormant

handoff. The MS then proceeds to step 410. In step 410 the MS sends an origination message to the new PDSN informing the PDSN of its location. The DRS flag in the origination message is set to zero, and the MS includes the number of PPP instances to establish (the number of dormant PPP instances associated with the MS) and an SR_ID associated with each such PPP instance.

Thus, a novel and improved method and apparatus for requesting PPP instances from a packet data services network have been described. Those of skill in the art would understand that the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. The various illustrative components, blocks, modules, circuits, and steps have been described generally in terms of their functionality. Whether the functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans recognize the interchangeability of hardware and software under these circumstances, and how best to implement the described functionality for each particular application. As examples, the various illustrative logical blocks, modules, circuits, and algorithm steps described in connection with the embodiments disclosed herein may be implemented or performed with a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components such as, e.g., registers and FIFO, a processor executing a set of firmware instructions, any conventional programmable software module and a processor, or any combination thereof. The processor may advantageously be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine. The software module could reside in RAM memory, flash memory, ROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. Those of skill would further appreciate that the data, instructions, commands, information, signals, bits, symbols, and chips that may be referenced throughout the above description are advantageously represented by voltages, currents, electromagnetic waves, magnetic fields or particles, optical fields or particles, or any combination thereof.

Preferred embodiments of the present invention have thus been shown and described. It would be apparent to one of ordinary skill in the art, however, that numerous alterations may be made to the embodiments herein

disclosed without departing from the spirit or scope of the invention. Therefore, the present invention is not to be limited except in accordance with the following claims.

5 WHAT IS CLAIMED IS:

CLAIMS

1. A method of informing a packet data services network of dormant
2 network connections associated with a mobile station when the mobile station
moves from a first infrastructure element of the packet data services network to
4 a second infrastructure element of the packet data services network, the method
comprising the step of:
6 transmitting from the mobile station a message including a
number of dormant network connections associated with the mobile station and
8 a list of identifiers associated with the dormant network connections.
2. The method of claim 1, wherein the dormant network connections
2 comprise point-to-point protocol connections.
3. The method of claim 1, wherein the first and second infrastructure
2 elements comprise packet data service nodes.
4. The method of claim 1, wherein the identifiers comprise service
2 reference identifiers.
5. The method of claim 1, wherein the message comprises an
2 origination message including an indicator that the dormant network
connections are dormant.
6. A mobile station configured to inform a packet data services
2 network of dormant network connections associated with the mobile station
when the mobile station moves from a first infrastructure element of the packet
4 data services network to a second infrastructure element of the packet data
services network, the mobile station comprising:
6 an antenna;
a processor coupled to the antenna; and
8 a processor-readable medium accessible by the processor and
containing a set of instructions executable by the processor to modulate and
10 transmit from the mobile station a message including a number of dormant
network connections associated with the mobile station and a list of identifiers
12 associated with the dormant network connections.

2 7. The mobile station of claim 6, wherein the dormant network connections comprise point-to-point protocol connections.

2 8. The mobile station of claim 6, wherein the first and second infrastructure elements comprise packet data service nodes.

2 9. The mobile station of claim 6 wherein the identifiers comprise service reference identifiers.

2 10. The mobile station of claim 6, wherein the message comprises an origination message including an indicator that the dormant network connections are dormant.

2 11. A mobile station configured to inform a packet data services network of dormant network connections associated with the mobile station when the mobile station moves from a first infrastructure element of the packet data services network to a second infrastructure element of the packet data services network, the mobile station comprising:

6 a device configured to transmit from the mobile station a message including a number of dormant network connections associated with the mobile station and a list of identifiers associated with the dormant network connections.

2 12. The mobile station of claim 11, wherein the dormant network connections comprise point-to-point protocol connections.

2 13. The mobile station of claim 11, wherein the first and second infrastructure elements comprise packet data service nodes.

2 14. The mobile station of claim 11, wherein the identifiers comprise service reference identifiers.

2 15. The mobile station of claim 11, wherein the message comprises an origination message including an indicator that the dormant network connections are dormant.

2 16. A mobile station configured to inform a packet data services network of dormant network connections associated with the mobile station

4 when the mobile station moves from a first infrastructure element of the packet
data services network to a second infrastructure element of the packet data
services network, the mobile station comprising:

6 means for transmitting from the mobile station a message
including a number of dormant network connections associated with the mobile
8 station and a list of identifiers associated with the dormant network
connections.

2 17. The mobile station of claim 16, wherein the dormant network
connections comprise point-to-point protocol connections.

2 18. The mobile station of claim 16, wherein the first and second
infrastructure elements comprise packet data service nodes.

2 19. The mobile station of claim 16, wherein the identifiers comprise
service reference identifiers.

2 20. The mobile station of claim 16, wherein the message comprises an
origination message including an indicator that the dormant network
connections are dormant.

1/5

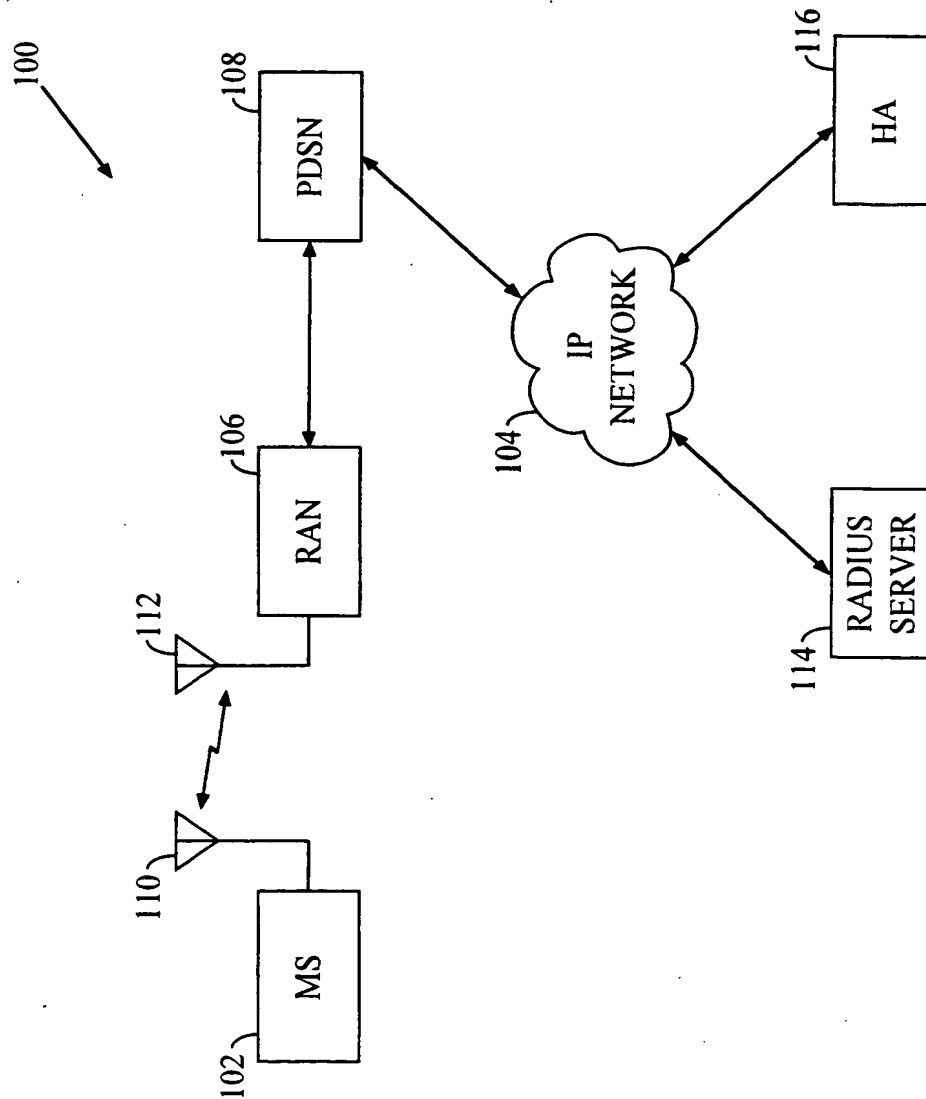


FIG. 1

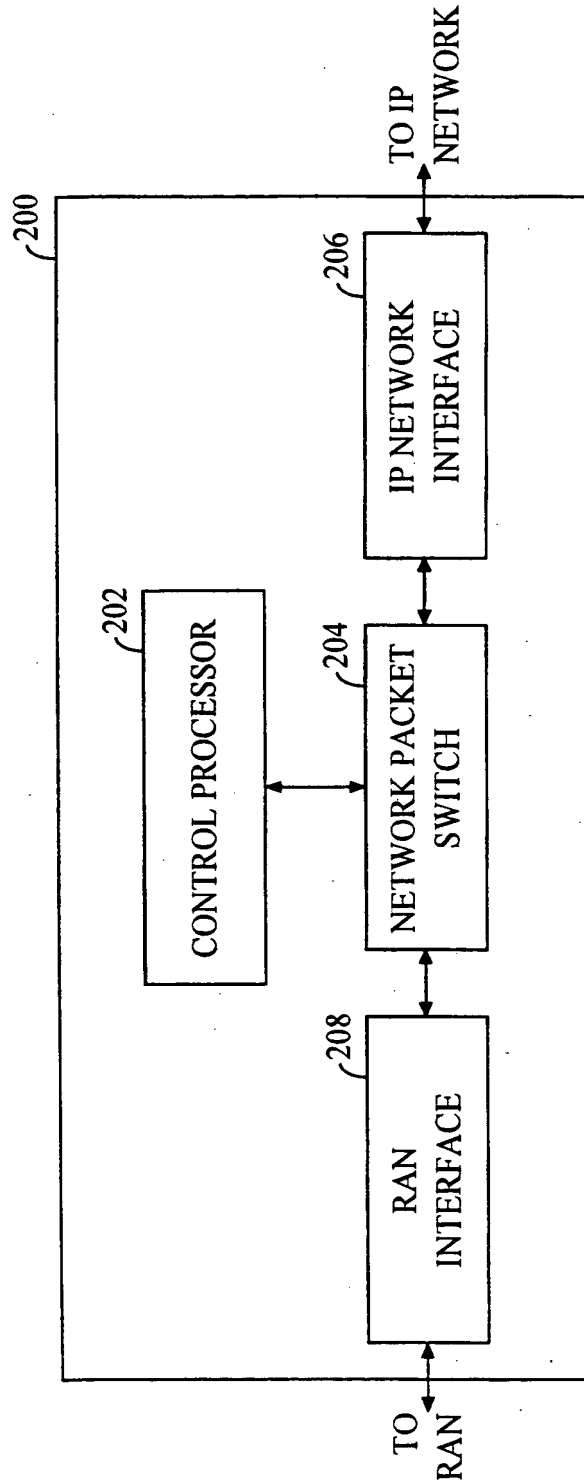


FIG. 2

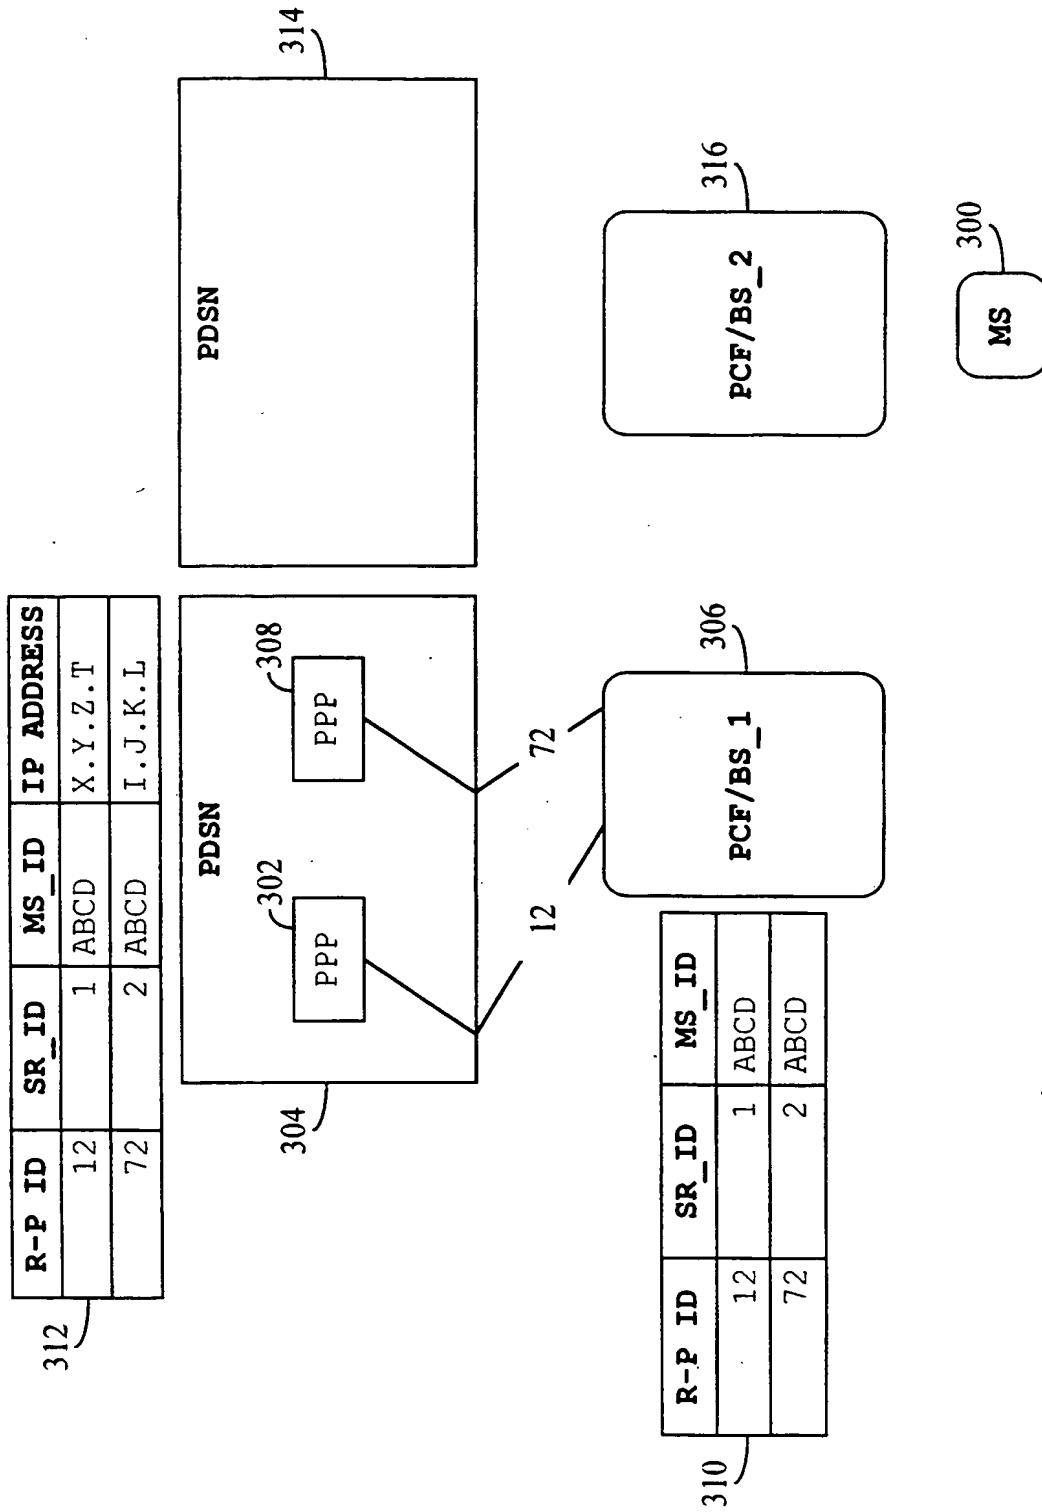


FIG. 3A (PRIOR ART)

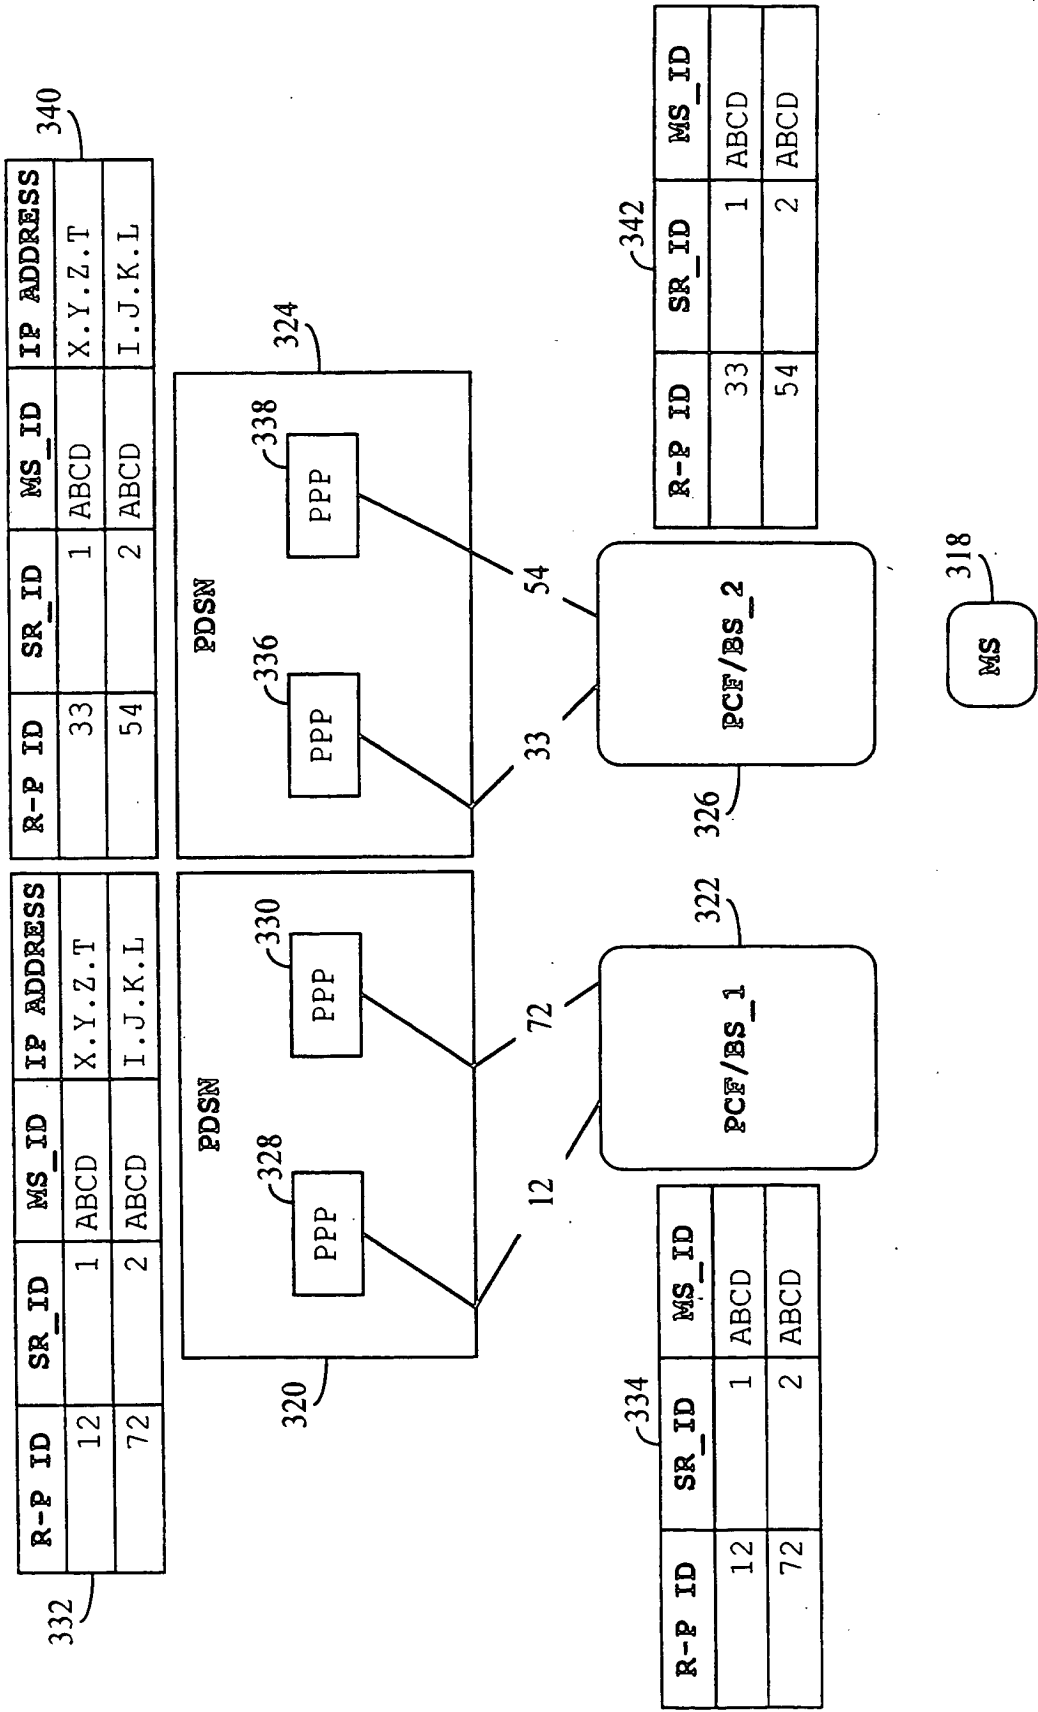


FIG. 3B

5/5

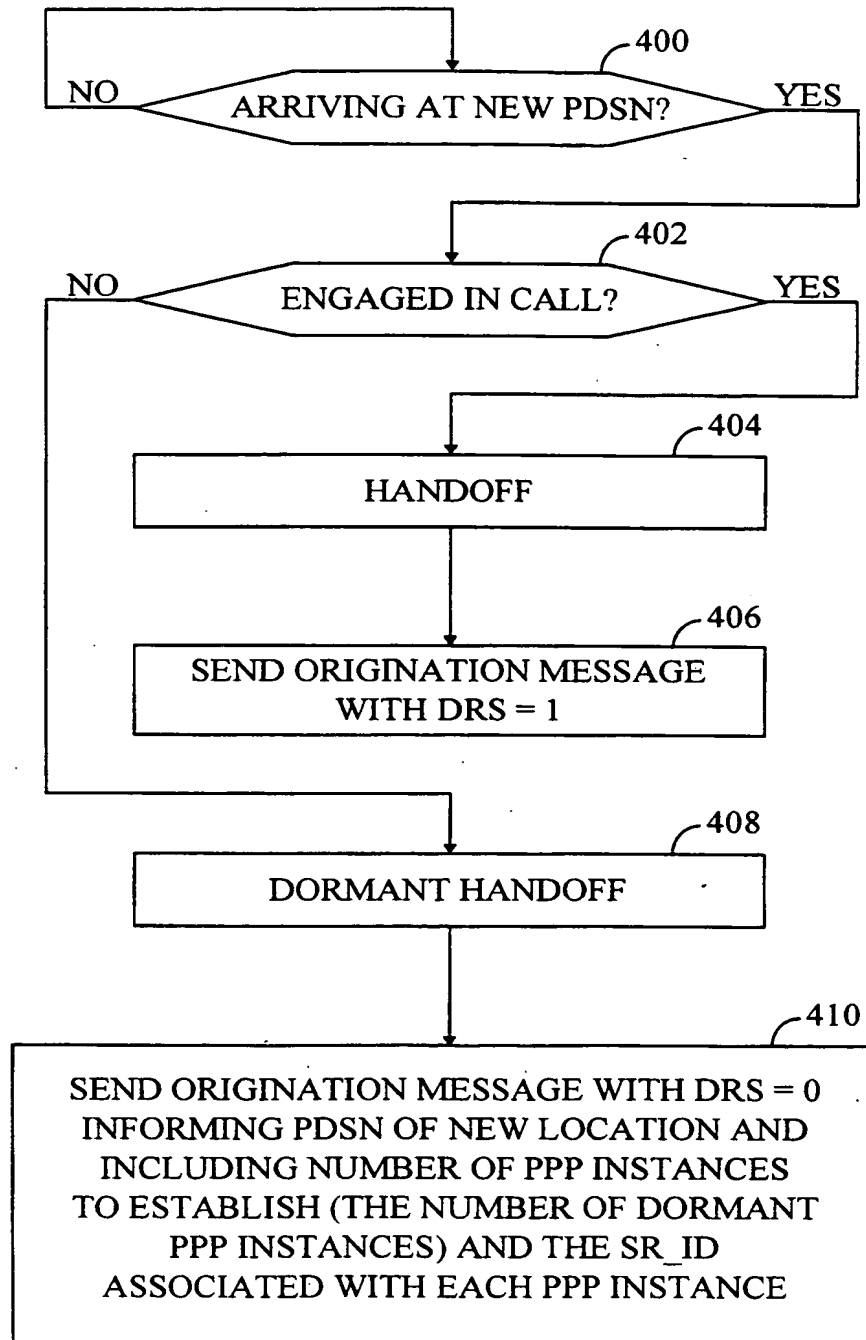


FIG. 4

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 July 2001 (12.07.2001)

PCT

(10) International Publication Number
WO 01/50783 A3

(51) International Patent Classification⁷: H04Q 7/22

(21) International Application Number: PCT/US01/00487

(22) International Filing Date: 3 January 2001 (03.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/477,278 4 January 2000 (04.01.2000) US

(71) Applicant: QUALCOMM INCORPORATED [US/US]:
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(72) Inventors: HSU, Raymond, Tah-Sheng: 17775 Penna-
cook Court, San Diego, CA 92127 (US). REZAIIFAR,
Ramin: 10896 Caminito Arcada, San Diego, CA 92131
(US).

(74) Agents: WADSWORTH, Philip, R. et al.: Qualcomm In-
corporated, 5775 Morehouse Drive, San Diego, CA 92121-
1714 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
10 January 2002

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR REQUESTING POINT-TO-POINT PROTOCOL (PPP) INSTANCES FROM A
PACKET DATA SERVICES NETWORK

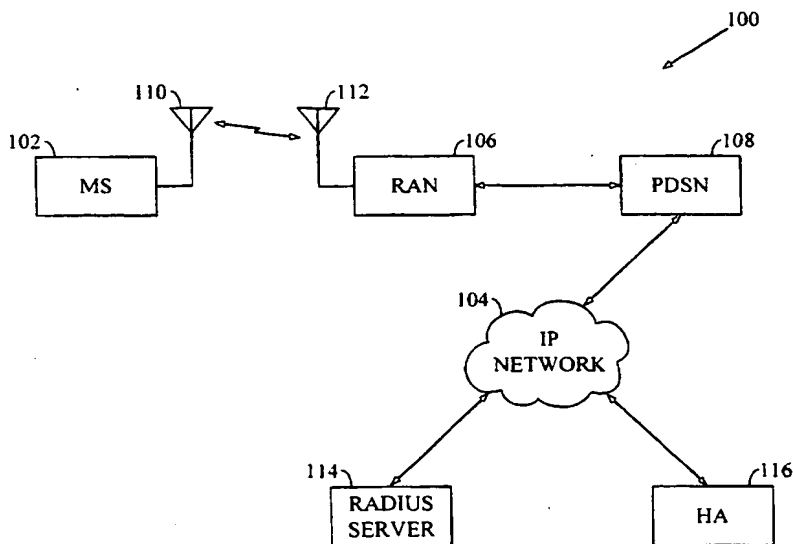

(57) Abstract: A method and apparatus for requesting PPP instances from a packet data services network includes a mobile station configured to send an origination message to a packet data service node (PDSN) at which it has arrived upon leaving the vicinity of another PDSN. The message informs the new PDSN of the new location of the mobile station and indicates both the number of dormant PPP instances associated with the mobile station and a service reference identifier for each such PPP instance. A flag within the message may be used to indicate whether the PPP instances are dormant (i.e., whether the mobile station is engaged in a call).

WO 01/50783 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/00487

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 912 027 A (LUCENT TECHNOLOGIES INC) 28 April 1999 (1999-04-28) page 2, line 57 -page 4, line 44 page 5, line 54 -page 6, line 25 page 10, line 45 -page 11, line 6 ---	1,6,11, 16
A	EP 0 955 755 A (NIPPON TELEGRAPH & TELEPHONE ;NTT MULTIMEDIA COMMUNICATIONS (US)) 10 November 1999 (1999-11-10) column 4, line 24 - line 55 column 5, line 42 -column 6, line 47 -----	1,6,11, 16

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.*** Special categories of cited documents :**

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

10 July 2001

Date of mailing of the international search report

17/07/2001

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pacholec, D

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/00487

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0912027 A	28-04-1999	CA 2249817 A	14-04-1999
		CA 2249830 A	14-04-1999
		CA 2249831 A	14-04-1999
		CA 2249836 A	14-04-1999
		CA 2249837 A	14-04-1999
		CA 2249838 A	14-04-1999
		CA 2249839 A	14-04-1999
		CA 2249862 A	14-04-1999
		CA 2249863 A	14-04-1999
		EP 0912026 A	28-04-1999
		EP 0910198 A	21-04-1999
		EP 0917320 A	19-05-1999
		EP 0917318 A	19-05-1999
		EP 0912012 A	28-04-1999
		EP 0917328 A	19-05-1999
		EP 0918417 A	26-05-1999
		EP 0912017 A	28-04-1999
		JP 11289353 A	19-10-1999
		JP 11252183 A	17-09-1999
		JP 11275154 A	08-10-1999
		JP 11275155 A	08-10-1999
		JP 2000022758 A	21-01-2000
		JP 11275156 A	08-10-1999
		JP 11275157 A	08-10-1999
		JP 11284666 A	15-10-1999
		JP 11331276 A	30-11-1999
EP 0955755 A	10-11-1999	JP 2000083060 A	21-03-2000

THIS PAGE BLANK (USPTO)